

TL-C04 Smart Toilet Water Pump



Typical Applications

- Smart Toilet
- Dishwasher
- Beauty Apparatus
- Medical Equipment
- Led Cooling, Semiconductor Cooling
- Other Boosters, Circulation And Cooling



Advantages

- Large flow, high pressure, powerful boost
- Instant start in 0.1 seconds
- Unique design, 45dB(A), low noise
- Small size, easy to install, no need to change the original configuration of the toilet
- High waterproof level, customizable diving function

Specification


Model	Product Code	Rated Voltage (VDC)	Max Water Flow (L/min)	Max Water Head (M)	Rated Current (A)	Rated Power (W)
TL-C04	TL-C04-A12-4808	12	48	8	4.7	56.4
	TL-C04-A24-5208	24	52	8	2.8	67.2

Customization: 1. /PWM or /5V speed control 2. /FG (RPM) signal wire 3. /S Submersible, liquid $\leq 50^{\circ}\text{C}$

- The data in the table is the measured performance when pure water is delivered at normal temperature.
- The maximum flow rate is the flow rate when water head is 0 meter, and the highest lift is the lift when water flow is 0 L/min.
- Noise $\leq 45\text{dB(A)}$
- Working mode: Interrupt

- IP level: IP68
- Coil Insulation class: Class F
- Ambient temperature: $-40^{\circ}\text{C} \sim 40^{\circ}\text{C}$
- Liquid temperature: $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$
- Do Not Run Pumps Dry.
- Pumps must be in a continuous flooded suction environment.

Curve

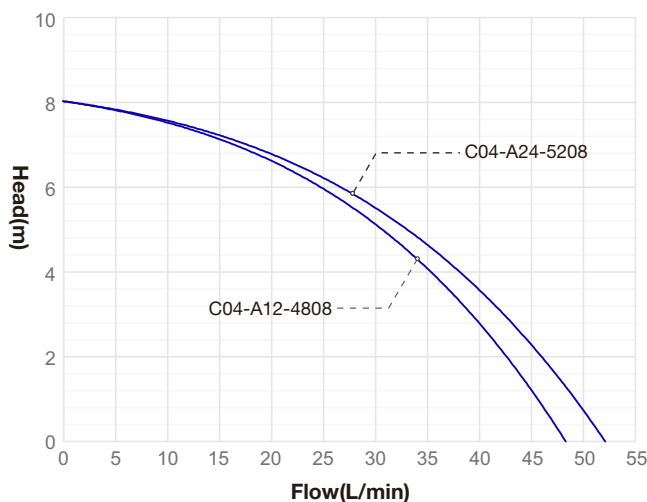

Dimension (mm)

